

# Two-waves approximation for reflected and transmitted energy in photonic crystals

B. Guizal, D. Felbacq, R. Smaïli

*LASMEA UMR-CNRS 6602*

*Complexe des Cézeaux*

*63177 Aubière Cedex, France*

(February 1, 2008)

## Abstract

We study electromagnetic waves scattering by a 2D photonic crystal made of a stack of diffraction gratings. In case where there are only two propagative modes in the crystal, we derive an explicit expression for the superior (resp.

inferior) envelope of the reflected (resp. transmitted) energy.

Photonic crystals are periodically modulated devices having photonic band gaps [1,2]. The theoretical study of these structures may be performed by use of Bloch waves theory, multi-scattering theory [3,4] or they can be modelled as stacks of gratings [5,6], which are the elementary layers of the device (cf. fig. 1). We use this last approach in this note.

Two situations can be roughly distinguished in the scattering behaviour of periodic structures: when the wavelength is of the same order of the period, the resonant domain, there are infinitely many evanescent modes and finitely many propagative modes in the structure (the number of which being given by Bloch waves theory). As the wavelength increases, the number of propagative modes diminishes and is finally reduced to 2. In the very large wavelength regime, the structure behaves as if it were homogeneous. In case of stacks of gratings, that leads to replace one grating by a homogeneous slab (fig.1) with some effective permittivity depending on the polarization [4,7]. However, there is an intermediate zone of wavelengths for which there are only two propagative modes inside the gratings, but the wavelength is not large enough to use a homogenization scheme (for instance  $\lambda$  is only two or three times the period). This work deals with this last situation. The crystal is made as a stack of  $N$  gratings (fig 1) with vacuum above and below.

We consider first an elementary layer. As there are only two propagative waves, there exists a  $2 \times 2$  matrix  $\mathbf{T}_{\lambda,\theta}$  such that  $\mathbf{T} \begin{pmatrix} A^+ \\ A^- \end{pmatrix} = \begin{pmatrix} B^+ \\ B^- \end{pmatrix}$  (see fig. 2 for the notations), the elements of  $\mathbf{T}$  are denoted  $(\mathbf{t}_{ij})$ . This matrix can be computed rigorously from a standard theory of diffraction by gratings (for instance the Coupled Waves Method, see [8] for example). The

main property of matrix  $\mathbf{T}$  is that  $\det(\mathbf{T}) = 1$  [10] so that if  $\mu$  is an eigenvalue then  $\mu^{-1}$  is the other eigenvalue. We have shown in another article [9] that in a layer characterized by a  $2 \times 2$  transfer matrix, the reflected and transmitted coefficients for  $N$  layers can be obtained in close form :

$$\begin{aligned} r_N(\lambda, \theta) &= f \frac{\mu^{2N} - 1}{\mu^{2N} - fg^{-1}} \\ t_N(\lambda, \theta) &= \mu^N \frac{(1 - fg^{-1})}{\mu^{2N} - fg^{-1}} \end{aligned} \quad (1)$$

where  $\mu$  is an eigenvalue of  $\mathbf{T}$  associated with an eigenvector  $(u_1, u_2)$ , an eigenvector associated to  $\mu^{-1}$  is denoted by  $(v_1, v_2)$  and

$$\begin{aligned} f(\lambda, \theta) &= \frac{i\beta_0 v_1 - v_2}{i\beta_0 v_1 + v_2}, \quad g(\lambda, \theta) = \frac{i\beta_0 u_1 - u_2}{i\beta_0 u_1 + u_2} \\ \text{and } \beta_0 &= \frac{2\pi}{\lambda} \cos(\theta) \end{aligned} \quad (2)$$

**Remarks:**

1) It is worth noticing that functions  $f$  and  $g$  do not depend on a particular choice of an eigenvector.

2) The expressions (1) are valid whatever the angle of incidence and polarization, it is only the particular expression of matrix  $\mathbf{T}$  that changes.

The expressions given in (1) show that **it suffices to compute the transfer matrix of one layer to compute the transmitted and reflected fields**. However, the reflected and transmitted energies are highly oscillating functions which can be better represented by their envelope (superior and inferior limits when  $N$  tends to infinity). We have shown in [11] that the superior envelope  $R_\infty$  of the reflected energy, and conversely the inferior envelope of the transmitted energy  $T_\infty$  are given by :

$$\begin{aligned} T_\infty &= \frac{4 - \text{tr}(\mathbf{T})^2}{(\mathbf{t}_{12}\beta_0 - \mathbf{t}_{21}\beta_0^{-1})^2} \\ R_\infty &= 1 - T_\infty \end{aligned} \quad (3)$$

We now turn to some numerical examples. We use as an elementary layer a lamellar dielectric grating with an air layer below (see fig. 1). The parameters are the following:  $h/\lambda = 1$ ,  $\varepsilon_a = 4$  and  $\varepsilon_b = 1$  with a filling factor of  $1/2$ . It is illuminated by an s-polarized monochromatic plane wave under normal incidence. We have plotted in fig. 3 the reflected energy versus  $\lambda/d$ , obtained for a stack of 20 layers. We see that above  $\lambda_c/d = 1.515$  the true reflection ratio is well approximated by (1): this corresponds to the critical wavelength above which there are only two modes in the structure (cf. fig. 4 for the band structure). Above  $\lambda_c/d$  we see an almost perfect agreement between the reflection computed from (1) and the reflection obtained from a rigorous code (fig. 3). Finally, we have plotted the envelope of the reflected energy obtained from (3), we see a perfect agreement above wavelength  $\lambda_c/d$ .

We have developed an approximate theory for the study of photonic band gap materials in case where there are two propagative modes in the structure in both  $s$ - and  $p$ -polarization.

This method allows explicit computations of the field once the  $2 \times 2$  transfer matrix of one layer is known. This last matrix can be obtained numerically, then equations (1) and (3) can be used to obtain close-form expressions of the diffracted field. This can be useful for studying the so-called "ultra-refractive" effects [12–14].

## Figure captions

**Figure 1:** Geometry of the photonic structure : the elementary cell is made of a grating, with period  $d$  filled with materials whose relative permittivities are  $\varepsilon_a$  and  $\varepsilon_b$ . There is a dielectric layer below.

**Figure 2:** Definition of the transfer matrix of a layer.

**Figure 3:** Reflection vs  $\lambda/d$ . Solid lines : reflection obtained from a rigorous theory. Dots : reflection obtained from formulas (1).

**Figure 4:** Band structure of the photonic device: when  $\lambda > \lambda_c$  there are only two propagative waves in the crystal.

**Figure 5:** (a) Envelope of the reflected energy (bold line) obtained from (3) and reflected energy (solid line).

(b) Zoom of figure 5 (a) around the bifurcation value  $\lambda_c/d$ .

## REFERENCES

- [1] J. Joannopoulos, R. Meade, J. Winn, *Photonic Crystals*, Princeton University Press, 1995.
- [2] J. Rarity and C. Weisbuch ed., *Micro-cavities and Photonic Band Gap: Physics and Applications*, Kluwer, 1996.
- [3] D. Felbacq, G. Tayeb, D. Maystre, *Scattering by a random set of parallel cylinder*, J. Opt. Soc. Am. A **11** (1994) 2526-2538.
- [4] E. Centeno, D. Felbacq, *Rigorous Vector Diffraction of electromagnetic waves by bidimensional Photonic Crystals*, J. Opt. Soc. Am. A. **17** ( 2000) 320-327.
- [5] D. Maystre, *Electromagnetic study of photonic band gaps*, Pure Appl. Opt. **3** (1994) 975-993.
- [6] A. A. Asatryan & al., *Effects of disorder on wave propagation in two-dimensional photonic crystals*, Phys. Rev. E **60** (1999) 6118-6127.
- [7] D. Felbacq, G. Bouchitté, *Homogenization of a set of parallel fibers*, Waves in Random Media **7**, 245 (1997).
- [8] M. G. Moharam, E. B. Grann, D. A. Andrew and T. K. Gaylord, *Formulation for stable and efficient implementation of the rigorous coupled-wave analysis of binary gratings*, J. Opt. Soc. Am. A **12** (2000) 1068.
- [9] D. Felbacq, B. Guizal, F. Zolla, *Do Fresnel coefficients exist ?* in preparation (physics/0104074).
- [10] D. Felbacq, B. Guizal, F. Zolla, *Wave propagation in one dimensional photonic crystals*, Opt. Com. **152** (1998) 119-126.
- [11] D. Felbacq, B. Guizal, F. Zolla, *Limit analysis of the diffraction of a plane wave by a one dimensional periodic medium*, J. Math. Phys. **39** (1998) 4604-4607.
- [12] D. Felbacq, B. Guizal, F. Zolla, *Ultra-refraction phenomena in Bragg mirrors*, J. Opt. A: Pure and Applied Optics **2** (2000) L30-L32.
- [13] B. Gralak, G. Tayeb, S. Enoch, , J. Opt. Soc. Am. A **17** (2000) 1012-1020.
- [14] S. Enoch, G. Tayeb, D. Maystre, *Numerical evidence of ultrarefractive optics in photonic crystal*, Opt. Com. **161** (1999) 171-176.

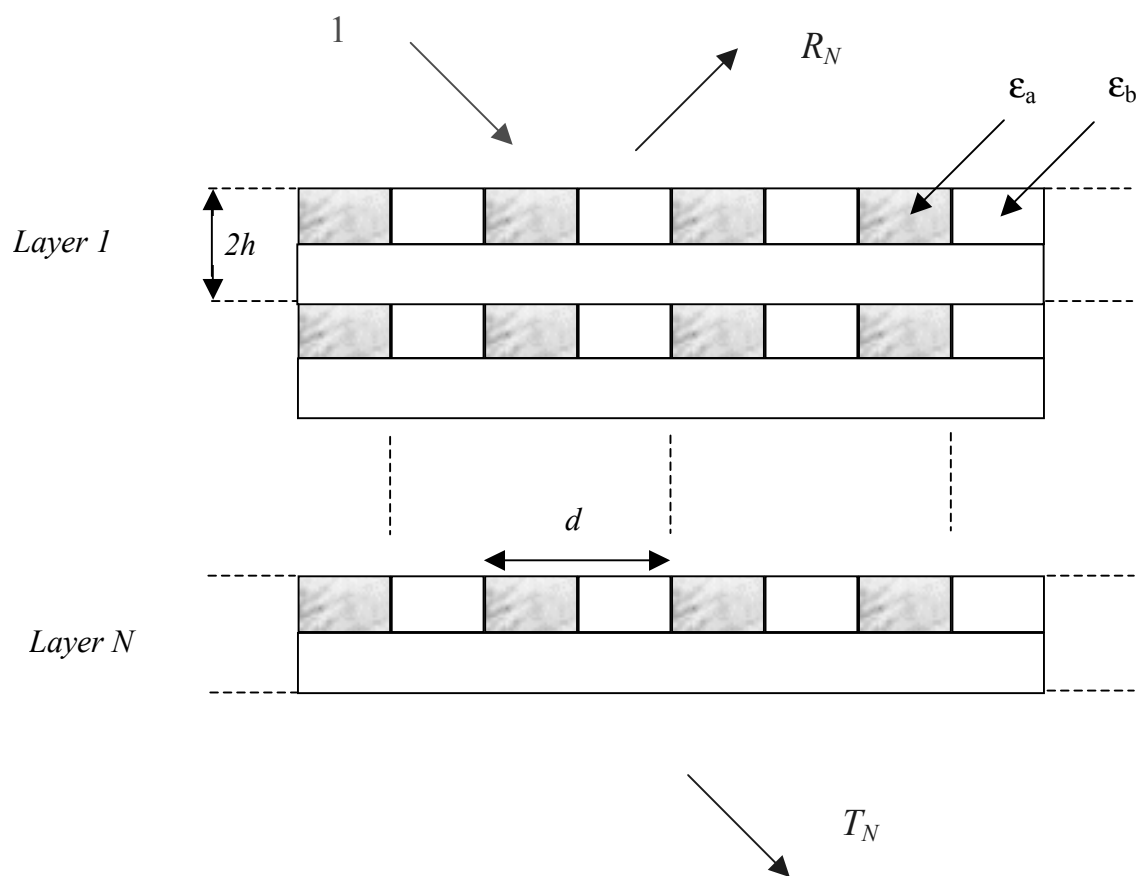


Figure 1

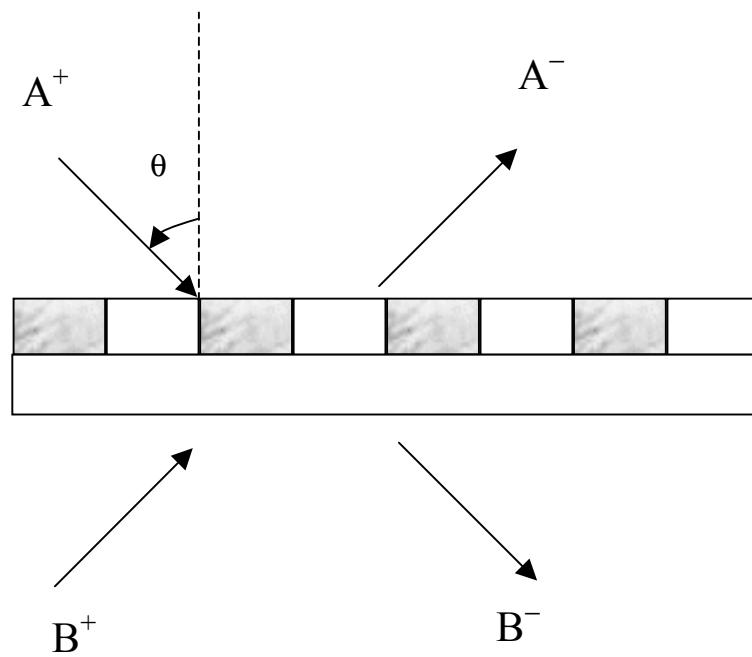


Figure 2

